


DISTILLER CARBON POST FILTER CUP INSTRUCTIONS

The disposable post filter cup contains granular activated carbon (GAC) produced from pure virgin coconut shell material. GAC acts as a final “polishing” agent to enhance taste and purity of steam distilled water by adsorption, aeration and degasification.

IMPORTANT: Filter cup must be immersed in about 2 cups of water for approximately five minutes to wet carbon.

Bottom seal must be removed before soaking and boiling.

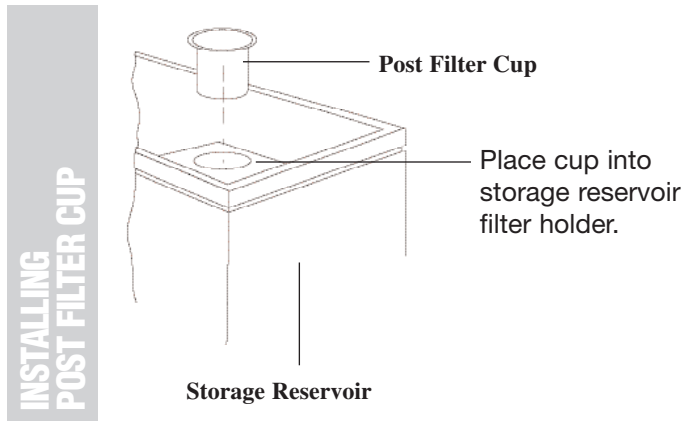

Operational maintenance and replacement requirements are essential for product to perform as advertised.

Sterilize & Rinse

Be sure bottom seal has been removed then fully immerse filter cup in boiling water for about five minutes. Allow filter cup to cool before handling. Pour 1 to 2 cups of DISTILLED water through the filter cup to rinse away any small harmless carbon fines (dust). Water draining from the filter cup may contain black dust. This is typical. This carbon dust is formed as a result of production, packaging and shipping of the filter cup.

Install

Place the sterilized/rinsed cup into filter holder in reservoir.

Replace

Discard used filter cup and replace it every two months or after 60-80 gallons of water processed (whichever comes first).

DO NOT reuse filter cup.

NOTE: Effective life of a filter cup will vary depending on quantity of water produced and the quality of tap water used. If you notice a change in taste of the steam distilled/filtered water, clean Distiller boiler tank and install a new filter cup.

Refer to Use & Care Guide for additional information and important safeguards. Contact your supplier or call (352) 787-5008 with questions.