

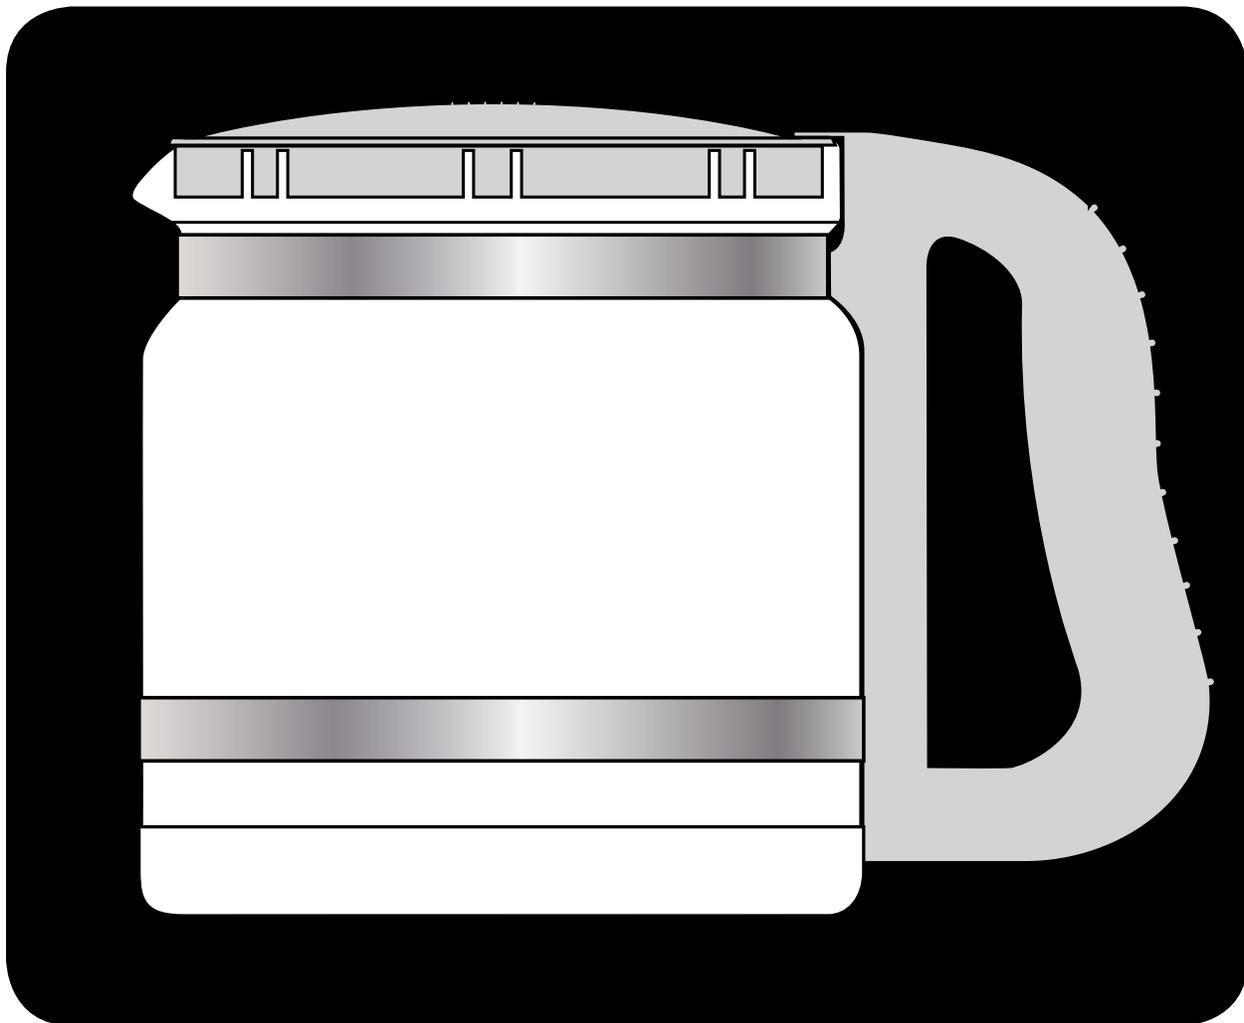
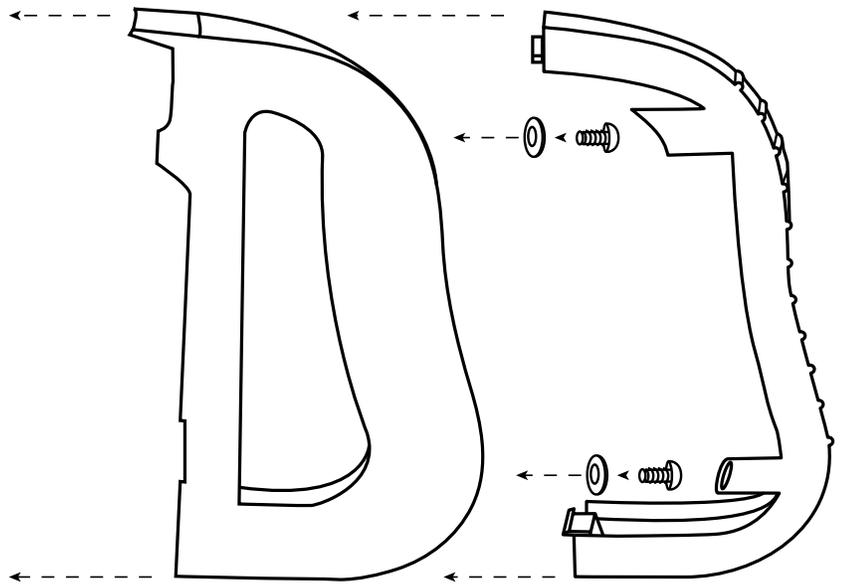


Assembly Instructions

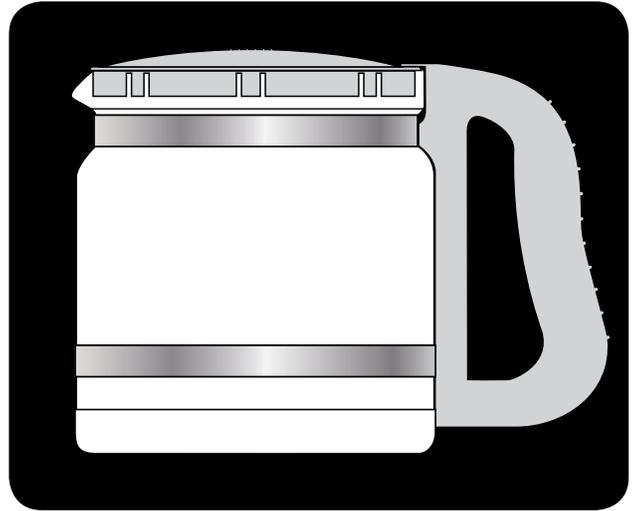

for Glass Collector Bottle

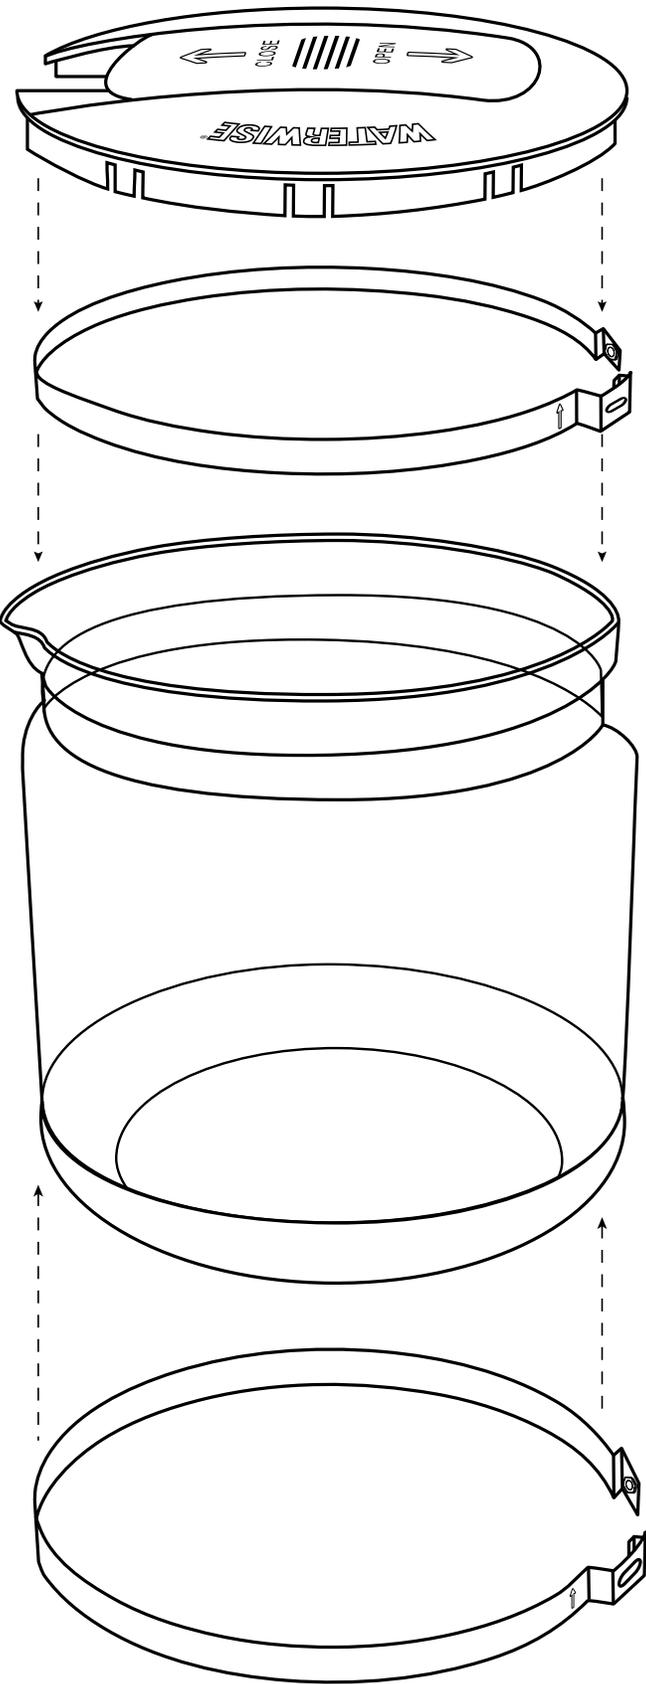

PARTS LIST:

- Glass Bottle with Protective Sleeve
- Lid with Slide Cover
- (2) Stainless Steel Bands
- Handle Assembly (2 Parts)
- (2) M5 Washers
- (2) M5 x 08mm x 10mm Screws

Tools required: Phillips and Standard Screwdrivers

1. Carefully remove all components and packing material from the collector bottle.

CAUTION:

To prevent breakage, **DO NOT** use force to remove these items.



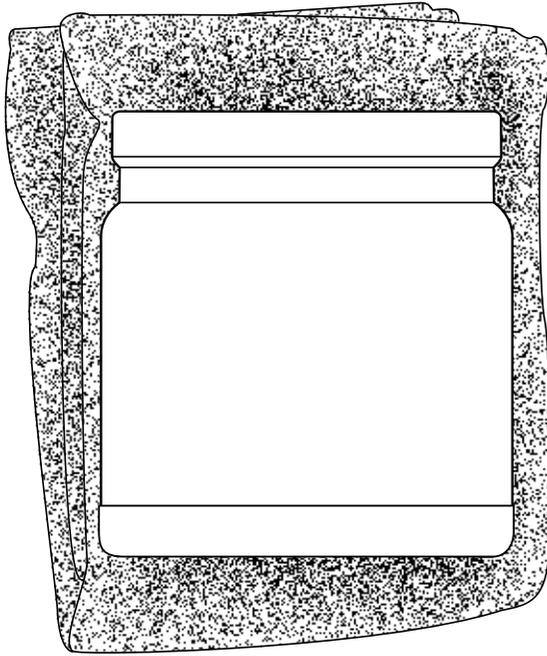



Figure A

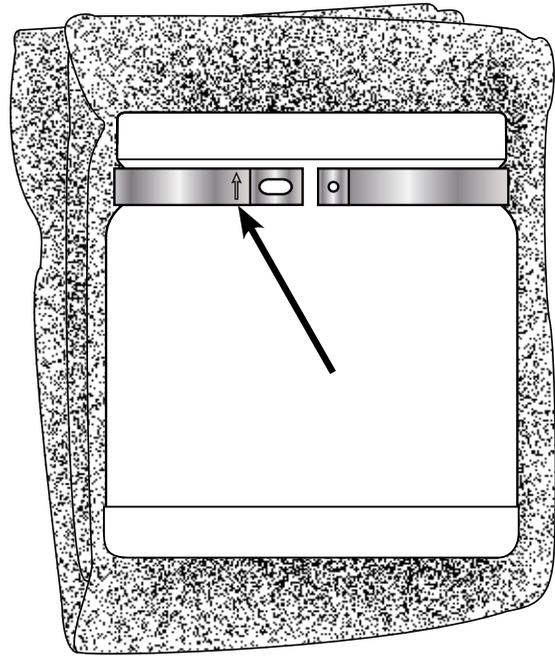

B

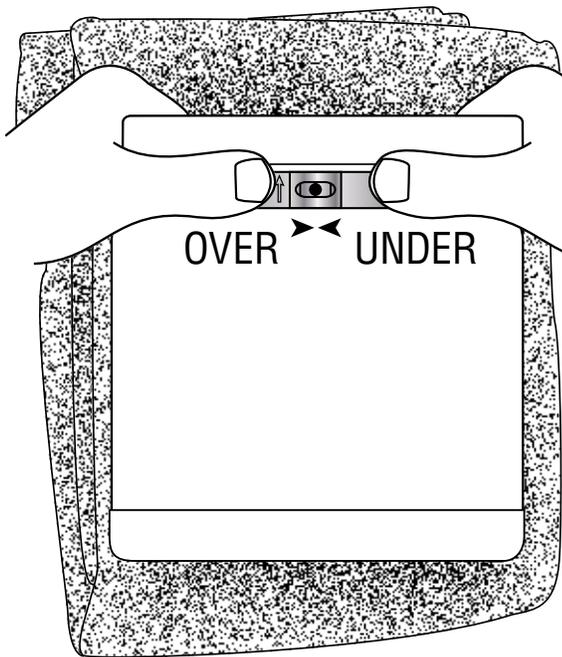

C

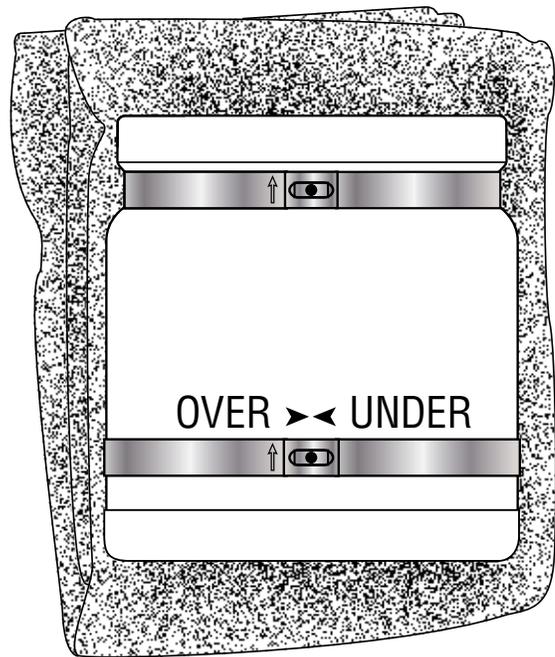


D

2. Place a folded bath-size towel on a flat work surface. Place the collector bottle on the towel, spout facing down. This will not only protect the bottle, it will stabilize the bottle so that you can install the stainless steel bands that attach the handle (*fig. A*).
3. Locate the shorter of the two bands and position it around the top of the bottle just below the rim, with the engraved arrow pointing toward the top of the bottle (*fig. B*). **NOTE:** It may be helpful to curl the bands into a tight circle before

wrapping around the bottle. With the spout facing down, align the two ends of the band directly opposite the spout, holding in place with your thumbs. Now, slide the two ends together hooking one over the other (*fig. C*).


4. Repeat step 3 with the longer band, this time at the base of the bottle above the protective sleeve (*fig. D*). Critical alignment will come later. **NOTE:** If the band is too tight to connect, remove the protective sleeve, connect the band and slide on from the bottom. —*OVER*—

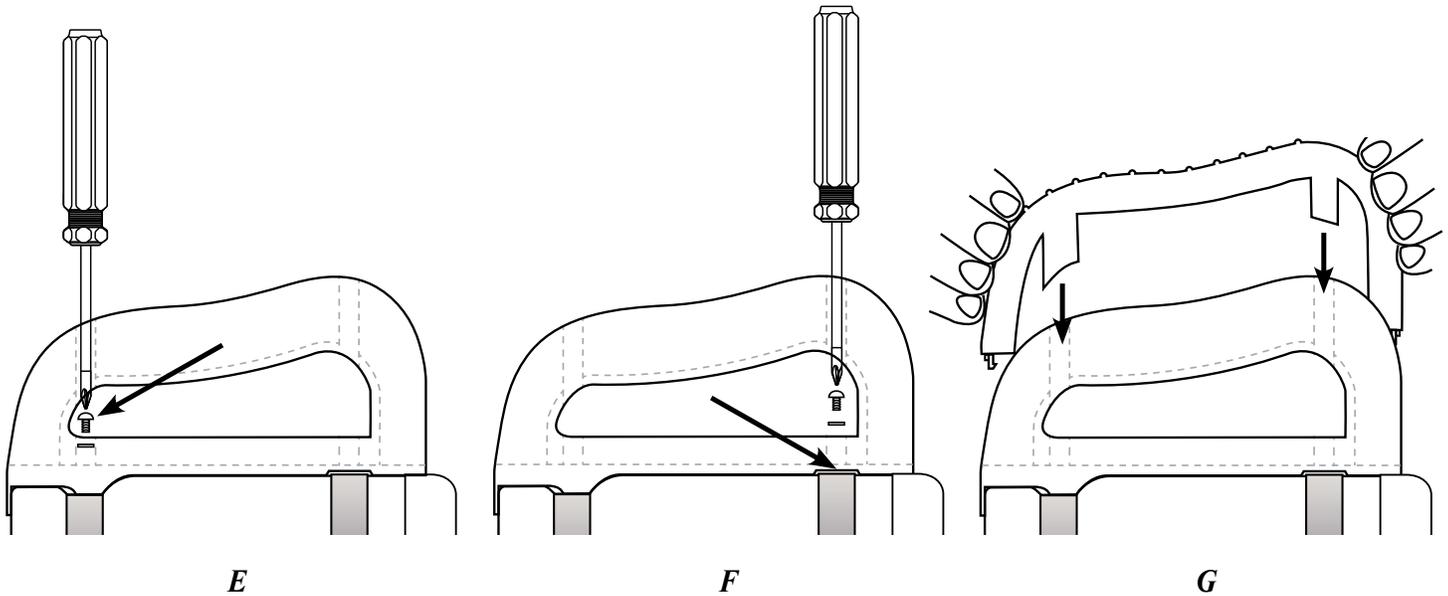


E

F

G

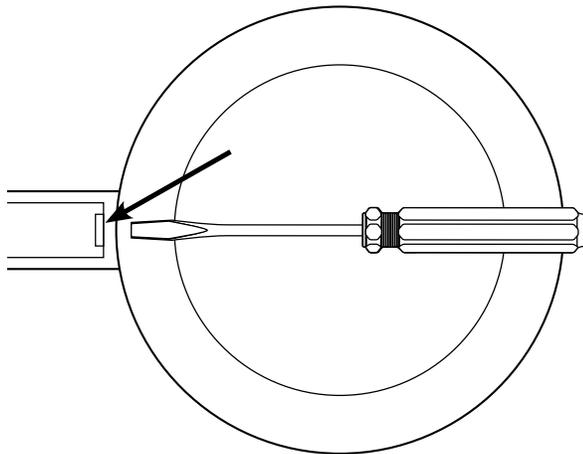

H

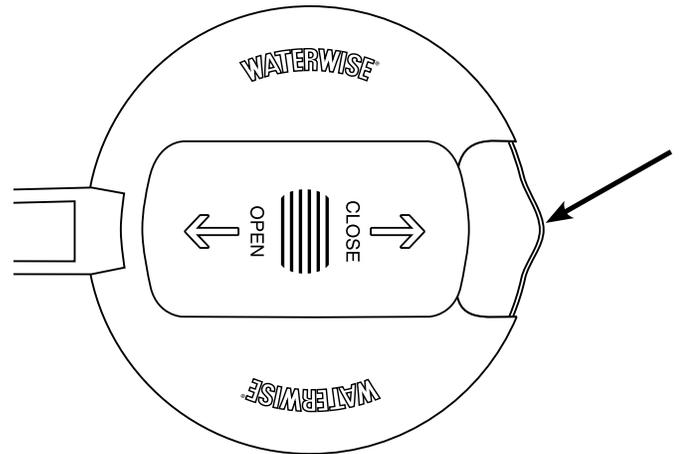

I

5. Place a washer and screw into the slot (**fig. E**) on the top of the handle (*the top has a protruding lip which goes over the rim of the bottle*). Place the handle into position over the bands aligning the openings of the handle with the slots of the bands. Tighten the screw using a Phillips screwdriver. **DO NOT** over tighten.
6. Reposition the longer band to correspond to the notch in the handle (**fig. F**) and install the other washer and screw. Tighten the screw using a Phillips screwdriver. **DO NOT** over tighten.
7. Once satisfied that the handle is in the proper position (*directly opposite the spout*), install the

handle cover by pressing into place with a horizontal downward motion until the alignment pins and the latching mechanism snap into place (**fig. G**). **NOTE:** Should it be necessary to remove the handle cover, do so by placing a standard screwdriver into the slot on the bottom of the handle and gently remove (**fig. H**).

8. Fill bottle approximately three-fourths full with warm tap water. Add one or two drops of dish detergent, wash bottle interior and lid, then rinse thoroughly.
9. Place lid onto bottle with pour outlet aligned with bottle pour spout (**fig. I**).